







NON SLAM DISC CHECK VALVE

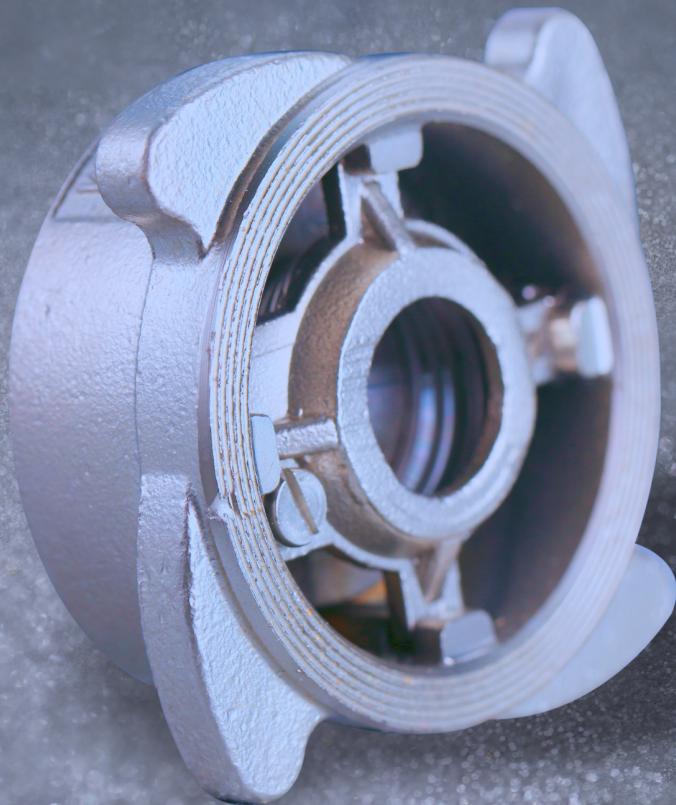

NON SLAM DISC CHECK VALVE (PN 40)

FEATURES

- ½" TO 4" (DN 15 TO DN 100)
- Metal To Metal Seat, Soft seat available on request
- Suitable for Class 150/300 IBR & Non IBR Flanges
- Horizontal or Vertical Mounted
- **Hydraulic Test Pressure :- 60 Bar**
- **Hydraulic Seat Test Pressure :- 44 Bar**
- **Working Temperature :- 425° Celcius Max**
- Precision Investment Casted

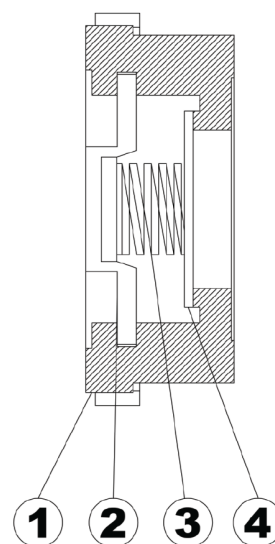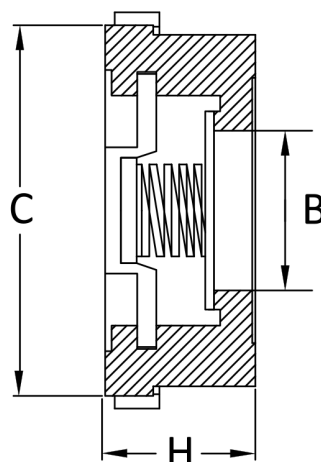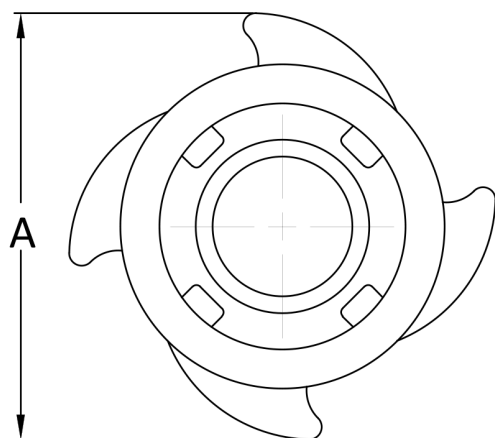

MATERIAL

S.NO	PART'S NAME	MATERIAL	SPECIFICATION	QTY
1	BODY	STAINLESS STEEL	ASTM A351 GR.CF8 / CF8M	1
2	SPRING LOCK	STAINLESS STEEL	AISI 304/316	1
3	SPRING	PTFE	AISI 304/316	1
4	DISC	STAINLESS STEEL	ASTM A351 GR.CF8 / CF8M	1

NOTE: Due to continues developments & upgrades, data mentioned above is subject to change without any notice.

DIMENSIONS

SIZE	A		B		C		H	
	mm	inch	mm	inch	mm	inch	mm	inch
15MM/1/2"	59	2.32	15	0.59	42.5	1.67	17	0.66
20MM/3/4"	69	2.72	20	0.78	48.5	1.89	20	0.78
25MM/1"	79	3.11	25	0.98	57.5	2.24	23	0.90
32MM/1-1/4"	89	3.50	32	1.25	65.5	2.57	28	1.10
40MM/1-1/2"	99	3.89	40	1.57	76	2.99	34	1.33
50MM/2"	115	4.52	50	1.97	91	3.58	40	1.57
65MM/2-1/2"	138	5.43	65	2.56	111	4.37	46	1.81
80MM/3"	159	6.26	75	2.95	131	5.15	50	1.97
100MM/4"	184	7.24	84	3.30	152	5.98	60	2.36

ACCUCAST PRODUCTS

Plot No. 8, Sangal Sohal Industrial Zone,
Backside Leather Complex Jalandhar

Ph No +91-181-2651948 , +91-74530-00063

E-mail : accucast_raj@hotmail.com, Info@acpvalves.in