



SWING CHECK VALVE


SERIES/ ACP-3100

SWING CHECK VALVE SCREWED END



FEATURES

- ½" TO 2" (DN 15 TO DN 50) • Full Bore
- Metal to Metal Seat, Soft seat available on request
- **Working Pressure :- 200 WOG**
- **Working Temperature :- (-)10° To 100° Celcius**
- Precision Investment Casted
- Screwed Threads To – BS 21 BSP/BSPT/NPT/
- DIN 259/2999 & ISO 228 & ISO 7/1
- Screwed Female Ends/Socket Weld Optional

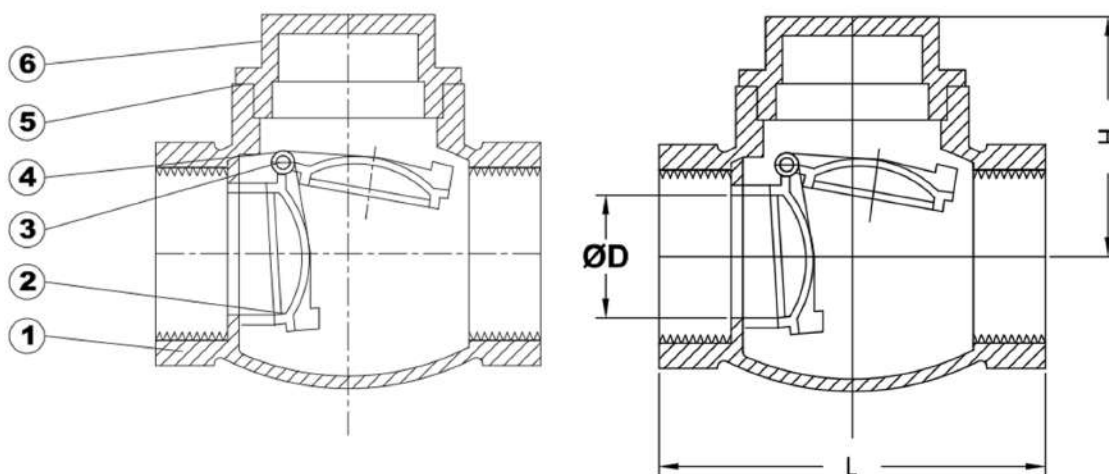

MATERIAL

S.NO	PART'S NAME	MATERIAL	SPECIFICATION	QTY
1	BODY	STAINLESS STEEL	ASTM A351 GR.CF8/CF8M	1
2	DISC	STAINLESS STEEL	ASTM A351 GR.CF8/CF8M	1
3	PIN	STAINLESS STEEL	AISI 304/316	1
4	NUT/STUD	STAINLESS STEEL	AISI 304/316	1
5	BONNET/NUT SEAL	PTFE	BS 6564	1
6	BONNET/NUT	STAINLESS STEEL	ASTM A351 GR.CF8/CF8M	1

NOTE: Due to continues developments & upgrades,
data mentioned above is subject to change without any notice.

DIMENSIONS

SIZE	L		øD		H	
	mm	inch	mm	inch	mm	inch
15MM/1/2"	63	2.48	15	0.59	43	1.69
20MM/3/4"	78	3.07	20	0.78	48	1.88
2MM5/1"	86	3.07	25	0.98	54	2.12
32MM/1-1/4"	100	3.93	32	1.26	67	2.63
40MM/1-1/2"	112.5	4.40	40	1.57	67	2.63
50MM/2"	135	5.31	50	1.97	74	2.91

ACCÜ CAST PRODUCTS

- Plot No. 8, Sangal Sohal Industrial Zone,
 Backside Leather Complex Jalandhar
 Ph No +91-181-2651948 , +91-74530-00063
 E-mail : accucast_raj@hotmail.com, Info@acpvalves.in

Follow us at: