



VERTICAL CHECK VALVE


SERIES/ ACP-3040

VERTICAL CHECK VALVE SCREWED END



FEATURES

- ½" TO 2" (DN 15 TO DN 50)
- Full Bore
- Metal to Metal seat. Soft seat available on request
- **Working Pressure :- 800 WOG**
- **Working Temperature :- (-)10° To (+)100° Celcius**
- Precision Investment Casted
- Screwed Threads To – BS 21 BSP/BSPT/NPT/
DIN 259/2999 & ISO 228 & ISO 7/1

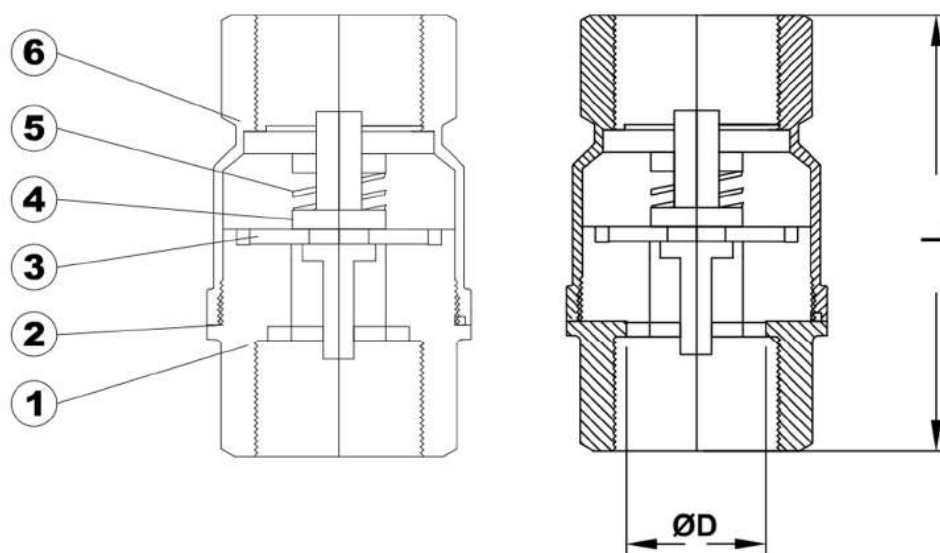

MATERIAL

S.NO	PART'S NAME	MATERIAL	SPECIFICATION	QTY
1	BODY/NUT	STAINLESS STEEL	ASTM A351 GR.CF8 / CF8M	1
2	NUT GASKET/SEAL	PTFE	BS 6564	1
3	SEAT	STAINLESS STEEL	ASTM A351 GR.CF8 / CF8M	1
4	DISC	STAINLESS STEEL	AISI 304/316	1
5	SPRING	STAINLESS STEEL	AISI 304/316	1
6	BODY	STAINLESS STEEL	ASTM A351 GR.CF8 / CF8M	1

NOTE: Due to continues developments & upgrades,
data mentioned above is subject to change without any notice.

DIMENSIONS

SIZE	L		ØD	
	mm	inch	mm	inch
15MM/1/2"	15	0.59	60	2.36
20MM/3/4"	19	0.74	62	2.44
25MM/1"	25	0.98	76	2.99
32MM/1-1/4"	31	1.22	85	3.34
40MM/1-1/2"	38	1.49	100	3.93
50MM/2"	48	1.88	108	4.25

ACCÜ CAST PRODUCTS

- Plot No. 8, Sangal Sohal Industrial Zone,
Backside Leather Complex Jalandhar
- Ph No +91-181-2651948 , +91-74530-00063
- E-mail : accucast_raj@hotmail.com, Info@acpvalves.in

Follow us at:   